




Siba PT fuse offering:

Type	Diameter (mm)	Length (mm)	Rated Voltage	Rated Current	Siba Part Number	Description
HHZ-BPT	24	142	3-7.2kV	0.5A - 5A	30 383 11.amp	Ferrule Current -Limiting, Back up
	24	195	3-7.2kV	0.5A - 3A	30 377 11.amp	
	39.6	220	3-7.2kV	0.5A - 5A	30 371 11.amp	
	24	195	6-12kV	0.5A - 4A	30 378 11.amp	
	22	160	6-12kV	0.1A - 6.3A	30 440 11.amp	
	39.6	220	6-12kV	0.5A - 5A	30 372 11.amp	
	39.6	220	10-17.5kV	0.5A - 3A	30 444 11.amp	
	39.6	340	10-17.5kV	0.5A - 5A	30 373 11.amp	
	24	359	10-17.5kV	0.5A - 3A	30 379 11.amp	
	39.6	340	10-24kV	0.5A - 5A	30 374 11.amp	
	24	359	10-24kV	0.5A - 3A	30 380 11.amp	
	24	310	10-24kV	0.5A - 3A	30 506 11.amp	
	22	280	10-24kV	0.1A - 6.3A	30 441 11.amp	
	22	250	10-24kV	0.1 - 2A	30 443 11.amp	
	24	359	20-36kV	0.5A - 3A	30 381 11.amp	
	39.6	440	20-36kV	0.5A - 3A	30 375 11.amp	
	36.5	418	20-36kV	0.1A - 2A	30 442 11.amp	
	39.6	440	38kV	30.15	30 531 11.amp	
39.6	327	40.5kV	0.5A - 1A	30 509 11.amp		
HHZ-BV	39.6	128	2.4-7.2kV	1A - 5A	30 516 11.amp	Ferrule Current Limiting, Back up , Threaded both sides (M8x10), Rough Surface For Encapsulation
	39.6	203	8.3kV-15.5kV	1A - 5A	30 517 11.amp	
	39.6	257	10kV-24kV	1A - 5A	30 508 11.amp	
	39.6	303	17.5kV-27kV	1A - 3A	30 518 11.amp	
	39.6	343	40.5kV	0.3A - 1A	30 509 11.amp	
HHZ-BE	24	142	2.4-7.2kV	0.5E - 4E	30 383 11.ampE	Ferrule Current Limiting, E -Rated, ANSI / IEEE C37.41
	24	195	2.4-7.2kV	0.5E - 7E	30 377 11.ampE	
	24	359	8.3-17.5kV	0.5E - 7E	30 379 11.ampE	
	39.6	327	15.5 kV	0.5E - 7E	30 435 11.ampE	
	24	359	36kV	0.5E - 1E	30 381 11.ampE	
HHD-BPT Clip Diamter 45mm	53mm	192	3-7.2kV	0.5A - 5A	30 002 11.amp w/o Striker	DIN style, current limiting, back-up
	53mm	192	3-7.2kV	2A - 5A	30 002 13.amp w Striker	
	53mm	292	3-7.2kV	2A - 5A	30 098 13.amp w Striker	
	53mm	192	6-12kV	0.5A - 5A	30 119 11.amp w/o Striker	
	53mm	192	6-12kV	2A - 5A	30 119 13.amp w Striker	
	53mm	292	6-12kV	0.5A - 5A	30 004 11.amp w/o Striker	
	53mm	292	6-12kV	2A - 5A	30 004 13.amp w striker	
	53mm	192	10-17.5kV	0.5A - 5A	30 179 11.amp w/o Striker	
	53mm	192	10-17.5kV	2A - 5A	30 179 13.amp w striker	
	53mm	292	10-17.5kV	0.5A - 5A	30 255 11.amp w/o Striker	
	53mm	292	10-17.5kV	2A - 5A	30 255 13.amp w striker	
	67mm	292	10-17.5kV	0.5A - 5A	30 221 11.amp w/o Striker	
	67mm	292	10-17.5kV	2A - 5A	30 221 13.amp w striker	
	53mm	367	10-17.5kV	0.5A - 5A	30 176 11.amp w/o Striker	
	53mm	367	10-17.5kV	2A - 5A	30 176 13.amp w striker	
	53mm	292	10-24kV	0.5A - 5A	30 180 11.amp w/o Striker	
	53mm	292	10-24kV	2A - 5A	30 180 13.amp w striker	
	53mm	442	10-24kV	0.5A - 5A	30 006 11.amp w/o Striker	
	53mm	442	10-24kV	2A - 5A	30 006 13.amp w striker	
	53mm	292	20-36kV	0.5A - 5A	30 382 11.amp w/o Striker	
	53mm	292	20-36kV	2A - 5A	30 382 13.amp w striker	
	53mm	442	20-36kV	0.5A - 5A	30 181 11.amp w/o Striker	
	53mm	442	20-36kV	2A - 5A	30 181 13.amp w striker	
	53mm	537	20-36kV	0.5A - 5A	30 008 11.amp w/o Striker	
	53mm	537	20-36kV	2A - 5A	30 008 13.amp w striker	
	53mm	537	38.5kV	0.5A - 5A	30 337 11.amp w/o Striker	
	53mm	537	38.5kV	2A - 5A	30 337 13.amp w striker	
	53mm	537	40.5kV	0.5A - 5A	30 340 11.amp w/o Striker	
53mm	537	40.5kV	2A - 5A	30 340 13.amp w striker		
53mm	442	10-24kV	0.5E - 6E	30 006 63.ampE w/o Striker		



PT fuse accessories:


HHZ-BPT

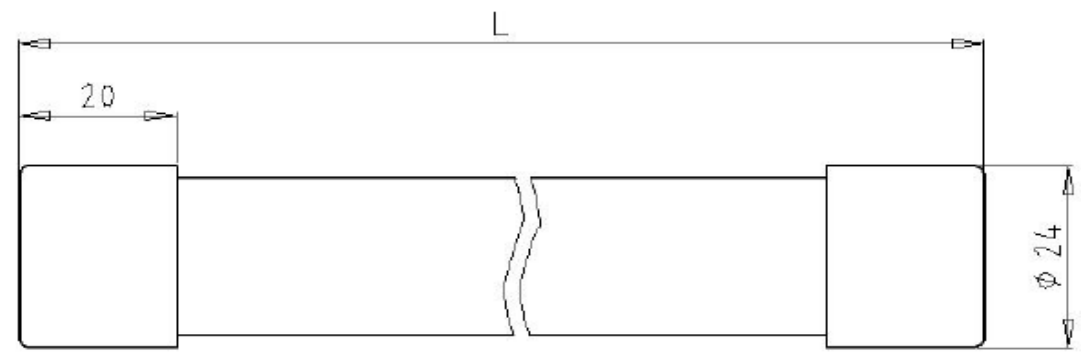

Fuse clips (diameter 22mm/24mm) use the following parts:

61 002 01.3	Fuse-Clip Screw Mountable
63 002 01	Clamping Plate
61 002 01.4	Terminal Link

HHD-BPT : All HHD-BPT are DIN 45mm

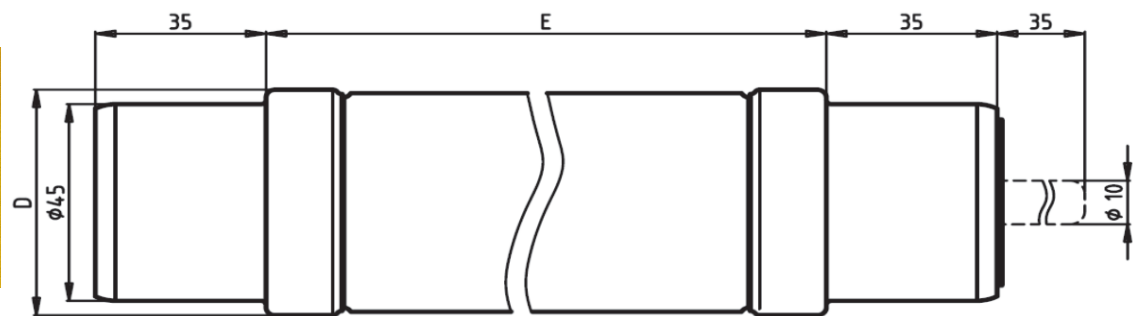


Fuse clips for the above fuses:

Fuse clips: 31 003 02.20

Fuse clips with connecting bar 34 002 01

30 435 11(15.5kV, 41.4x327mm), use the following clips:

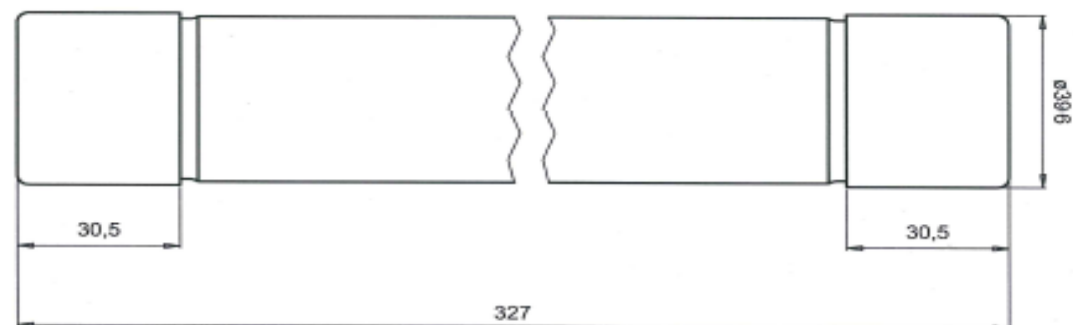

Fuse clips for the above fuses:

Fuse clips: 91 094 01.3

Clamping plate: 91 094 01.4