


Size **14 x 51 mm** Rated voltage **AC 690 V (IEC) · AC 700 V (UL)** Operating class **gR** Rated breaking capacity **200 kA**

Rated current	Part No. without striker pin	Part No. with striker pin	Power loss W	Pre-arcing I ² t-value A ² s	Total I ² t-value @ 660 V A ² s
6 A	50 124 06	50 126 06	1.3	2.9	18
8 A	50 124 06	50 126 06	1.7	5.1	28
10 A	50 124 06	50 126 06	2.6	7.7	39
12 A	50 124 06	50 126 06	3.1	8.1	75
16 A	50 124 06	50 126 06	4.7	11	115
20 A	50 124 06	50 126 06	6.0	21	190
25 A	50 124 06	50 126 06	7.6	32	340
32 A	50 124 06	50 126 06	9.5	63	620
40 A	50 124 06	50 126 06	10.0	140	1,050
50 A	50 124 06	50 126 06	12.0	250	1,900

Cut-off-characteristics

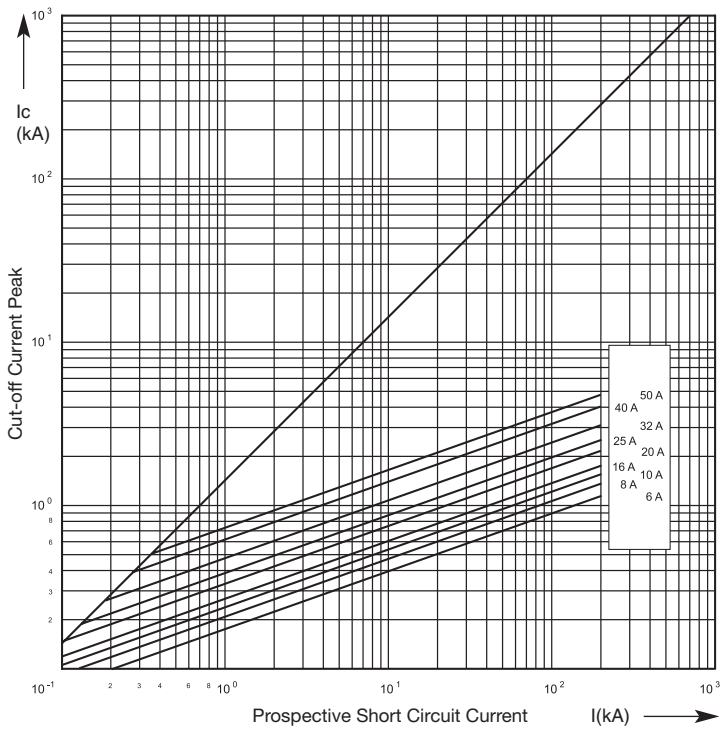

Time / Current Characteristics

