



MINIATURE FUSES
GLASS TUBE > 1.25 A WITH FILLING

F


Size
5 x 30 mm

Rated voltage
500 V

fast acting

Standard
not standardized


Rated current	Part No.	Rated breaking capacity	Weight (kg/100)	Pack
32 mA	171 530	50 A	0.12	100
50 mA	171 530	50 A	0.12	100
63 mA	171 530	50 A	0.12	100
80 mA	171 530	50 A	0.12	100
100 mA	171 530	50 A	0.12	100
125 mA	171 530	50 A	0.12	100
160 mA	171 530	50 A	0.12	100
200 mA	171 530	50 A	0.12	100
250 mA	171 530	50 A	0.12	100
315 mA	171 530	50 A	0.12	100
400 mA	171 530	50 A	0.12	100
500 mA	171 530	50 A	0.12	100
630 mA	171 530	50 A	0.12	100
800 mA	171 530	50 A	0.12	100
1 A	171 530	50 A	0.12	100
1.25 A	171 530	50 A	0.12	100
1.6 A	171 530	80 A	0.12	100
2 A	171 530	80 A	0.12	100
2.5 A	171 530	80 A	0.12	100
3.15 A	171 530	80 A	0.12	100
4 A	171 530	80 A	0.12	100
5 A	171 530	80 A	0.12	100
6.3 A	171 530	80 A	0.12	100
8 A	171 530	80 A	0.12	100
10 A	171 530	80 A	0.12	100



Pre-arcing time limits

Part No. 171 530

Rated current	1.5 I _n	2.75 I _n	4 I _n	10 I _n
32 mA ▼ 10 A	> 1 h	< 100 s	< 600 ms	< 80 ms

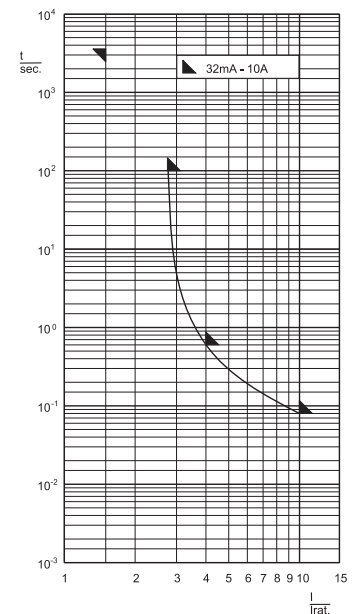




MINIATURE FUSES
GLASS TUBE > 1.25 A WITH FILLING **M**

Size **5 x 30 mm** Rated voltage **500 V** medium time lag Standard **not standardized**

Rated current	Part No.	Rated breaking capacity	Weight (kg/100)	Pack
32 mA	172 530	50 A	0.12	100
50 mA	172 530	50 A	0.12	100
63 mA	172 530	50 A	0.12	100
80 mA	172 530	50 A	0.12	100
100 mA	172 530	50 A	0.12	100
125 mA	172 530	50 A	0.12	100
160 mA	172 530	50 A	0.12	100
200 mA	172 530	50 A	0.12	100
250 mA	172 530	50 A	0.12	100
315 mA	172 530	50 A	0.12	100
400 mA	172 530	50 A	0.12	100
500 mA	172 530	50 A	0.12	100
630 mA	172 530	50 A	0.12	100
800 mA	172 530	50 A	0.12	100
1 A	172 530	50 A	0.12	100
1.25 A	172 530	50 A	0.12	100
1.6 A	172 530	80 A	0.12	100
2 A	172 530	80 A	0.12	100
2.5 A	172 530	80 A	0.12	100
3.15 A	172 530	80 A	0.12	100
4 A	172 530	80 A	0.12	100
5 A	172 530	80 A	0.12	100
6.3 A	172 530	80 A	0.12	100
8 A	172 530	80 A	0.12	100
10 A	172 530	80 A	0.12	100



Pre-arcing time limits

Part No. 172 530

Rated current	1.5 I _n	2.75 I _n	4 I _n	10 I _n
32 mA	> 1 h	50 ms	20 ms	5 ms
10 A		30 s	2 s	100 ms

