


# DRIWISA™ EPOXY-RESIN STANDOFF INSULATORS INDOOR SERVICE

## Selection chart

<b>TECHNICAL DATA:</b>		RATED VOLTAGE	MAXIMUM VOLTAGE	CLASS	CANTILEVER STRENGTH	NUMBER OF FINS	WITHSTAND VOLTAGE 60 Hz	BASIC IMPULSE LEVEL
TYPE	MODEL	kV	kV		N		kV(1min)	kV
A	DWA-07A	6.6	7.2	4	4000	1	27	60
A	DWA-15A	13.8	17.5	4	4000	4	45	95
A	DWA-20A	23	25.8	4	4000	5	55	125
A	DWA 30A	34.5	38	4	4000	9	75	150
B	DWA-07B	6.6	7.2	8	8000	1	27	60
B	DWA-15B	13.8	17.5	8	8000	4	45	95
B	DWA-20B	23	25.8	8	8000	5	55	125
B	DWA-30B	34.5	38	8	8000	9	75	150
C	DWA-07C	6.6	7.2	16	16000	3	27	60
C	DWA-15C	13.8	17.5	16	16000	5	45	95
C	DWA-20C	23	25.8	16	16000	7	55	125
C	DWA-30C	34.5	38	16	16000	11	75	150

## GENERAL DIMENSIONS:

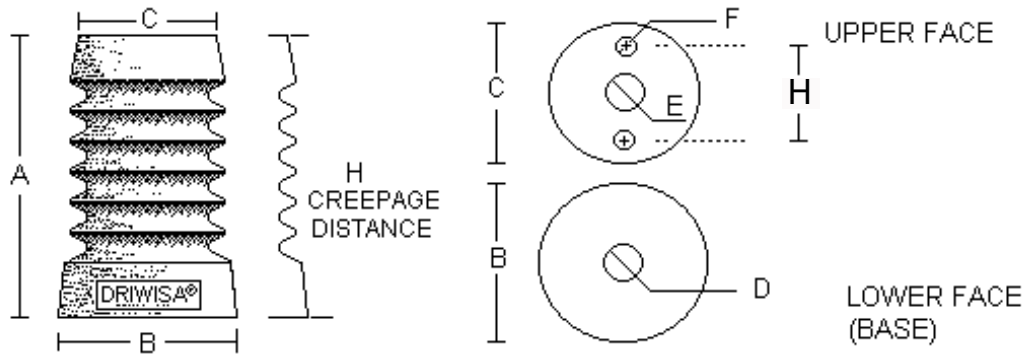

DW-1001

TYPE	MODEL	A mm	B mm	C mm	D inches	E inches	F inches	G mm	H mm
		height dia.	base dia.	upper face anchor	lower anchor	upper central anchor	off-center anchors	separation of side anchors	creepage distance
A	DWA-07A	100	60	60	1/2	3/8	1/4	36	115
A	DWA-15A	165	75	57	5/8	3/8	1/4	36	230
A	DWA-20A	210	82	57	5/8	3/8	1/4	36	290
A	DWA 30A	300	100	71	5/8	3/8	1/4	36	430
B	DWA-07B	100	75	75	5/8	5/8	3/8	46	120
B	DWA-15B	165	85	77	3/4	5/8	3/8	46	230
B	DWA-20B	210	90	77	3/4	5/8	3/8	46	290
B	DWA-30B	300	100	100	1	5/8	3/8	46	433
C	DWA-07C	100	127	127	3/4	5/8	3/8	66	253
C	DWA-15C	165	127	127	3/4	5/8	3/8	66	403
C	DWA-20C	210	127	127	3/4	5/8	3/8	66	533
C	DWA-30C	300	127	127	1	5/8	3/8	66	719