


## HV Fuse-bases

for indoor application

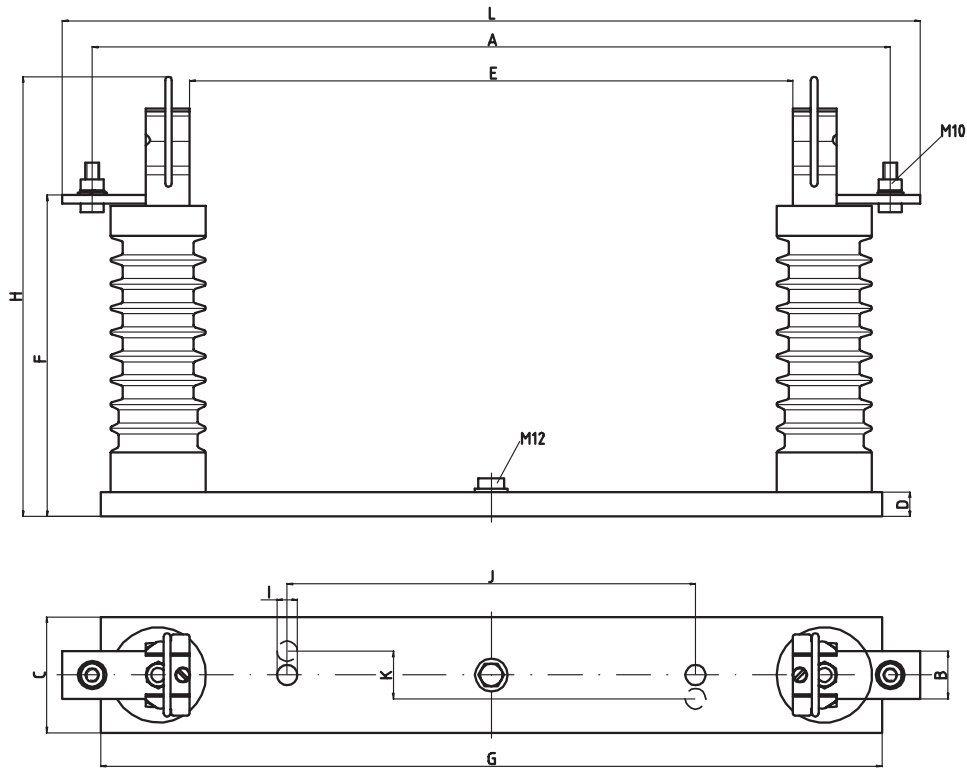

Rated Voltage 7.2 kV  
Part No. 31 001 02

Rated Voltage 12 kV  
Part No. 31 003 02

Rated Voltage 24 kV  
Part No. 31 005 02

Rated Voltage 36 kV  
Part No. 31 007 02

Rated Voltage 24 kV  
Part No. 31 221 01\*

A	13.78" (350 mm)	A	17.72" (450 mm)	A	23.62" (600 mm)	A	27.36" (695 mm)	A	17.72" (450 mm)
B	1.38" (35 mm)	B	1.38" (35 mm)	B	1.38" (35 mm)	B	1.38" (35 mm)	B	1.38" (35 mm)
C	3.35" (85 mm)	C	3.35" (85 mm)	C	3.35" (85 mm)	C	3.35" (85 mm)	C	3.35" (85 mm)
D	0.70" (18 mm)	D	0.70" (18 mm)	D	0.70" (18 mm)	D	0.70" (18 mm)	D	0.70" (18 mm)
E	7.60" (193 mm)	E	11.54" (293 mm)	E	17.44" (443 mm)	E	21.18" (538 mm)	E	11.54" (293 mm)
F	6.14" (156 mm)	F	6.14" (156 mm)	F	9.30" (236 mm)	F	12.83" (326 mm)	F	9.30" (236 mm)
G	12.20" (310 mm)	G	16.14" (410 mm)	G	22.60" (574 mm)	G	26.60" (676 mm)	G	16.14" (410 mm)
H	9.53" (242 mm)	H	9.53" (242 mm)	H	12.68" (322 mm)	H	16.22" (412 mm)	H	12.68" (322 mm)
I	0.60" (15 mm)	I	0.60" (15 mm)	I	0.60" (15 mm)	I	0.60" (15 mm)	I	0.60" (15 mm)
J	2.17" (55 mm)	J	7.10" (180 mm)	J	11.80" (300 mm)	J	14.96" (380 mm)	J	7.10" (180 mm)
K	1.38" (35 mm)								
L	14.96" (380 mm)	L	18.90" (480 mm)	L	24.80" (630 mm)	L	28.54" (725 mm)	L	18.90" (480 mm)

\* Reduced Length for 24 kV Fuse links, E= 292 mm