

# Class H - Time Delay



## Specifications

**Voltage Rating:** ODS - 600Vac  
ODN - 250Vac

**Interrupting Rating:** 10kA @ 600Vac  
10kA @ 250Vac

**Amp Range:** 15-600A

**Approvals:** CSA C22.2 no. 248  
certified Type 'D'

**Ratings available:** 15, 17-1/2, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125, 150, 175, 200, 250, 300, 350, 400, 450, 500, 600A.



Part number example - ODN-30

Fusetek's ODN/ODS fuses are Class H time delay fuses with a 'D' characteristic which meets the Canadian Electrical Code requirements for low melting-point temperature fuses. They have standard Class H (one-time) dimensions and can replace any other class H fuse where a time delay characteristic is desired.

- Standard Class H dimensions.
- Time delay for surge current applications
- Meets CEC low melting point requirement.

## Companion Products

250V fuseblocks - Type LH25  
600V fuseblocks - Type LH60

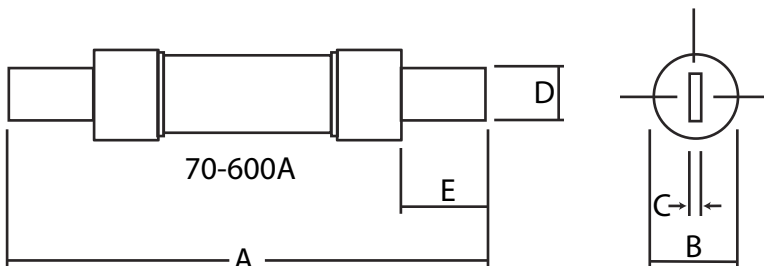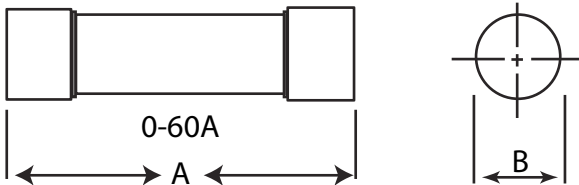

## ODN Dimensions

	DIMENSIONS - INCHES (mm)				
	A	B	C	D	E
15 - 30A	2.00 (50.8)	0.56 (14.2)	-	-	0.50 (12.7)
35-60A	3.00 (76.2)	0.81 (20.6)	-	-	0.63 (16)
70-100A	5.88 (149)	1.06 (26.9)	0.13 (3.18)	0.75 (19.1)	1.00 (25.4)
110-200A	7.13 (181)	1.63 (41.4)	0.19 (4.76)	1.13 (28.7)	1.38 (35.1)
225-400A	8.63 (219)	2.13 (54.1)	0.25 (6.35)	1.63 (41.4)	1.88 (47.8)
450-600A	10.4 (264)	2.63 (66.8)	0.25 (6.35)	2 (50.8)	2.25 (57.2)

## ODS Dimensions

15 - 30A	5.00 (127)	0.81 (20.6)	-	-	0.63 (16)
35-60A	5.50 (139)	1.06 (26.9)	-	-	0.63 (16)
70-100A	7.88 (200)	1.38 (35.1)	0.13 (3.18)	0.75 (19.1)	1.00 (25.4)
110-200A	9.63 (244)	1.88 (47.8)	0.19 (4.76)	1.13 (28.7)	1.38 (35.1)
225-400A	11.6 (295)	2.63 (66.8)	0.25 (6.35)	1.63 (41.4)	1.88 (47.8)
450-600A	13.4 (340)	3.13 (79.5)	0.25 (6.35)	2.00 (50.8)	2.25 (57.2)