


Other types and tag arrangements


Our 3" diameter R and E rated ferrule (clip-in) are available with modified caps/tags as shown below. The modification of the end fittings does not affect the electrical performance of the fuse. Please refer to the appropriate basic ferrule fuse data.




Hookey Feature
- add 'W' to part number

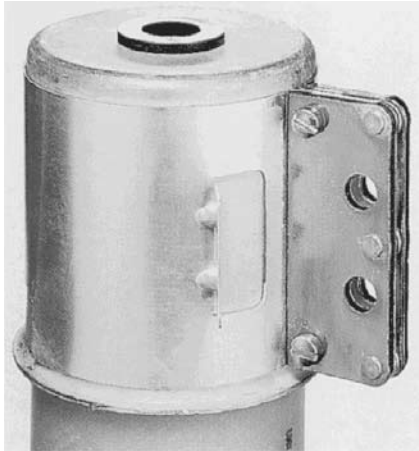


Bolt-in Tags
- add 'Bi' to part number

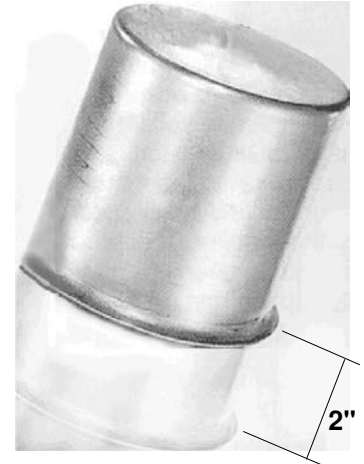

2" Extension
- add 'X' to part number



GE Bolt in tags
add 1B or 1iB to part number

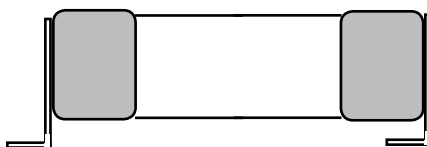

ITE Clip-Loc feature
- add 'CL' to part number

Option Availability									
	2.75kV - R	5.5kV - R	8.3kV - R	2.75kV - E	5.5kV - E	8.3kV - E	15.5kV - E	25.8kV - E	38kV - E
Plain Ferrule	•	•	•	•	•	•	•	•	•
Bi bolt-in	•	•	•						
W Hookey				•	•	•	•	•	•
1B bolt-in	•	•							
1iB bolt-in	•	•	•						
CL ClipLoc					•	•	•		
X body extension		•			•	•	•		